

Submittal


Split System Air Conditioner

A4AC4018D1000A
A4AC4018D1000B
A4AC4018D1000C
A4AC4018D1000D



Note: "Graphics in this document are for representation only. Actual model may differ in appearance."

Outline Drawing

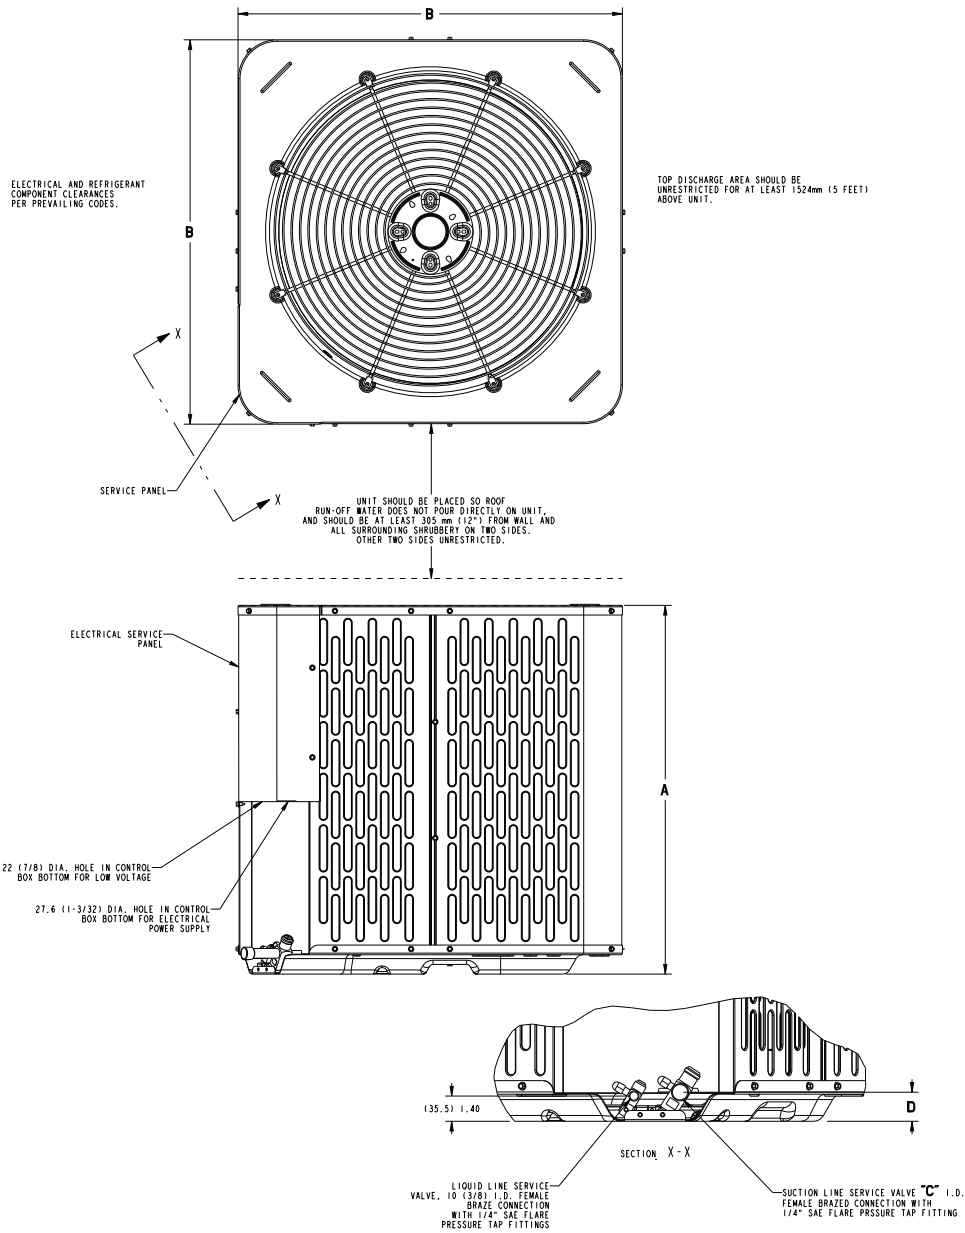

Model	Base	A	B	C	D
A4AC4018D	2.2	727 (28-5/8)	651 (25-5/8)	19 (3/4)	41 (1-5/8)

SOUND POWER LEVEL									
Model	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power [dB]							
		63 Hz*	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
A4AC4018D	74	74	71	65	68	67	63	56	50

Note: Rated in accordance with AHRI Standard 270-2008 *For reference only.

Product Specifications

OUTDOOR UNIT ^{(a) (b)}	A4AC4018D1000A	A4AC4018D1000B	A4AC4018D1000C	A4AC4018D1000D
POWER CONNS. — V/PH/HZ ^(c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
MIN. CIR. AMPACITY	14	14	14	13
MAX. OVERCURRENT PROTECTION	25	20	25	20
COMPRESSOR	SCROLL	SCROLL	SCROLL	SCROLL
NO. USED — NO. STAGES	1 — 1	1 — 1	1 — 1	1 — 1
VOLTS/PH/HZ	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
R.L. AMPS ^(d) — L.R. AMPS	10.9 — 62.9	10.1 — 52	10.9 — 62.9	10.1 — 52
FACTORY INSTALLED	YES/NO	YES/NO	YES/NO	YES/NO
START COMPONENTS ^(e)	NO	NO	NO	NO
INSULATION/SOUND BLANKET	NO	NO	NO	NO
COMPRESSOR HEAT	NO	NO	NO	NO
OUTDOOR FAN	PROPELLER	PROPELLER	PROPELLER	PROPELLER
DIA. (IN.) — NO. USED	27.5	27.5	27.5	27.5
TYPE DRIVE — NO. SPEEDS	DIRECT — 1	DIRECT — 1	DIRECT — 1	DIRECT — 1
CFM @ 0.0 IN. W.G. ^(f)	2720	2720	2720	2720
NO. MOTORS — HP	1 — 1/8	1 — 1/8	1 — 1/8	1 — 1/8
MOTOR SPEED R.P.M.	1075	1075	1075	1075
VOLTS/PH/HZ	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
F.L. AMPS	0.85	0.85	0.85	0.85
OUTDOOR COIL — TYPE	ALL ALUMINUM	ALL ALUMINUM	ALL ALUMINUM	ALL ALUMINUM
ROWS — F.P.I.	1 — 24	1 — 24	1 — 24	1 — 24
FACE AREA (SQ. FT.)	13.44	13.44	13.44	13.44
TUBE SIZE (IN.)	3/8	3/8	3/8	3/8
REFRIGERANT				
LBS. — R-410A (O.D. UNIT) ^(g)	4 LBS., 11 OZ	4 LBS., 11 OZ	4 LBS., 11 OZ	4 LBS., 11 OZ
FACTORY SUPPLIED	YES	YES	YES	YES
LINE SIZE — IN. O.D. GAS ^{(h) (i)}	3/4	3/4	3/4	3/4
LINE SIZE — IN. O.D. LIQ.	3/8	3/8	3/8	3/8
CHARGING SPECIFICATIONS				
SUBCOOLING	10°F	10°F	10°F	10°F
DIMENSIONS	H X W X D	H X W X D	H X W X D	H X W X D
CRATED (IN.)	31.1 x 26.9 x 26.9	31.1 x 26.9 x 26.9	31.1 x 26.9 x 26.9	31.1 x 26.9 x 26.9
WEIGHT				
SHIPPING (LBS.)	158	158	158	158
NET (LBS.)	134	134	134	134

(a) Certified in accordance with the Air-Source Unitary Air-conditioner Equipment certification program, which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270.

(c) Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.

(d) This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.

(e) No means no start components. Yes means quick start kit components. Optional authorized kits include KIT07689 for RunTru or BAYKSKT267.

(f) Standard Air — Dry Coil — Outdoor

(g) This value approximate. For more precise value see unit nameplate.

(h) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or refrigerant piping application guide SS-APG006-xx for long line sets or specialty applications (xx denotes latest revision).

(i) The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. Always verify proper system charge via subcooling (TXV/EEV) or superheat (fixed orifice) per the unit nameplate.

Mechanical Specification Options

General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 1995. Exterior is designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. The corner panels are prepainted. All panels are subjected to our 1,000 hour salt spray test .

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and low and high pressure switches.

Compressor

The compressor features internal over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this system has a cooling capacity to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

The addition of the BAYLOAM108 low ambient kit permits ambient cooling to 20°F.

Thermostats—Cooling only and heat/cooling (manual and automatic change over). Sub-base to match thermostat and locking thermostat cover.

About Trane and American Standard Heating and Air Conditioning

Trane and American Standard create comfortable, energy efficient indoor environments for residential applications. For more information, please visit www.trane.com or www.americanstandardair.com.



The AHRI Certified mark indicates company participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.

AM-PRQ-A4AC4018D-1C-EN 02 May 2023
Supersedes AM-PRQ-A4AC4018D-1B-EN (July 2022)